

TYPE SLM (外螺紋接頭90°)

Type-SLM

SLM is suitable for the liquidtight metallic conduit type C and type W.


Material: 304 Stainless steel; TPE plastics, rubber modified

Protection Degree: IP66

Properties: Liquidtight, corrosion resistance, high mechanical strength.
Passed RoHS

- 產品材質：采用不銹鋼304加工，TPE塑料，改性橡膠；
- 防護等級：IP66
- 產品性能：防液體滲漏，耐腐蝕，機械强度高，通過RoHS測試
- 適用範圍：適用於C型和W型防水金屬軟管于設備的連接

型號 Type	適配軟管 For conduit size	螺紋 Thread size
SLM-12	3/8"	G1/2
SLM-16	1/2"	G1/2
SLM-20	3/4"	G3/4
SLM-25	1"	G1
SLM-32	1-1/4"	G1-1/4
SLM-38	1-1/2"	G1-1/2
SLM-51	2"	G2
SLM-64	2-1/2"	G2-1/2
SLM-75	3"	G3
SLM-100	4"	G4

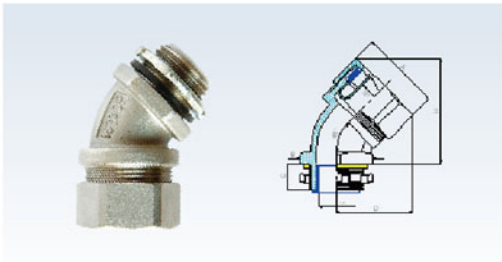

TYPE SHM (外螺紋接頭45°)

Type-SHM

SHM is suitable for the liquidtight metallic conduit type C and type W

Material: 304 Stainless steel; TPE plastics, rubber modified

Protection Degree: IP66

Properties: Liquidtight, corrosion resistance, high mechanical strength.
Passed RoHS

- 產品材質：采用不銹鋼304加工，TPE塑料，改性橡膠
- 防護等級：IP66
- 產品性能：防液體滲漏，耐腐蝕，機械强度高，通過RoHS測試
- 適用範圍：適用於C型和W型防水金屬軟管于設備的連接

型號 Type	適配軟管 For conduit size	螺紋 Thread size
SHM-12	3/8"	G1/2
SHM-16	1/2"	G1/2
SHM-20	3/4"	G3/4
SHM-25	1"	G1
SHM-32	1-1/4"	G1-1/4
SHM-38	1-1/2"	G1-1/2
SHM-51	2"	G2
SHM-64	2-1/2"	G2-1/2
SHM-75	3"	G3
SHM-100	4"	G4