

TYPE ZGLM (外螺紋接頭90°)


Type- ZGLM

ZGLM is suitable for the liquidtight metallic conduit type C and type W .

- Material: Zinc alloy, zinc or chrome surface ; TPE plastics, rubber modified .
- Protection Degree: IP66
- Properties: Liquidtight , corrosion resistance,high mechanical strength, passed RoHS

- 產品材質: 採用鋅合金壓鑄而成, 表面鍍鋅或鍍鉻;
TPE塑料, 改性橡膠
- 防護等級: IP66
- 產品性能: 防液體滲漏, 耐腐蝕, 機械强度高,
通過RoHS測試
- 適用範圍: 適用於C型和W型防水金屬軟管于設備的連接

型號 Type	適配軟管 For conduit size	螺紋 Thread size
ZGLM-12	3/8"	G1/2
ZGLM-16	1/2"	G1/2
ZGLM-20	3/4"	G3/4
ZGLM-25	1"	G1
ZGLM-32	1-1/4"	G1-1/4
ZGLM-38	1-1/2"	G1-1/2
ZGLM-51	2"	G2
ZGLM-64	2-1/2"	G2-1/2
ZGLM-75	3"	G3
ZGLM-100	4"	G4

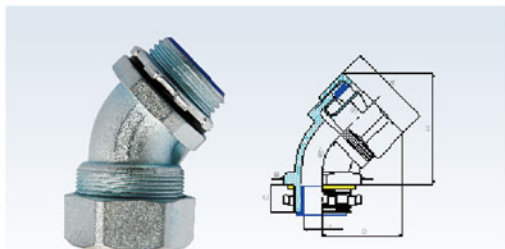

TYPE ZGHM (外螺紋接頭45°)

Type- ZGHM

ZGHM is suitable for the liquidtight metallic conduit type C and type W .

- Material: Zinc alloy, zinc or chrome surface ; TPE plastics, rubber modified
- Protection Degree: IP66
- Properties: Liquidtight , corrosion resistance,high mechanical strength, passed RoHS

- 產品材質: 採用鋅合金壓鑄而成, 表面鍍鋅或鍍鉻;
TPE塑料, 改性橡膠
- 防護等級: IP66
- 產品性能: 防液體滲漏, 耐腐蝕, 機械强度高,
通過RoHS測試
- 適用範圍: 適用於C型和W型防水金屬軟管于設備的連接

型號 Type	適配軟管 For conduit size	螺紋 Thread size
ZGHM-12	3/8"	G1/2
ZGHM-16	1/2"	G1/2
ZGHM-20	3/4"	G3/4
ZGHM-25	1"	G1
ZGHM-32	1-1/4"	G1-1/4
ZGHM-38	1-1/2"	G1-1/2
ZGHM-51	2"	G2
ZGHM-64	2-1/2"	G2-1/2
ZGHM-75	3"	G3
ZGHM-100	4"	G4