

## 增強型防水金屬軟管 (CA型)

Enhanced Liquidtight Flexible Metal Conduit (TYPE CA)

SONGYAM



CA型軟管 廣泛應用於大型機械設備及特種設備，其極高的防機械損傷性能，為其中的導體提供了良好的保護，其外部PVC材料的防曬功能保證軟管能在戶外長期使用。  
通過RoHS測試

型號 Type	規格尺寸 Trade size	最小內徑 Min. inner(mm)	最大外徑 Max. outer(mm)	彎曲半徑 Bending(mm)	包裝數量 Coil(m)
CA-8	1/4"	7.8	12.5	30	100
CA-10	5/16"	10.2	14.5	40	50
CA-12	3/8"	12.3	18.0	50	50
CA-16	1/2"	15.8	21.3	65	50
CA-20	3/4"	20.6	26.7	85	50
CA-25	1"	26.4	33.4	105	50
CA-32	1-1/4"	34.2	42.2	135	20
CA-38	1-1/2"	40.0	48.3	160	20
CA-51	2"	51.0	60.3	200	20
CA-64	2-1/2"	63.0	73.0	250	10
CA-75	3"	76.8	88.9	320	10
CA-100	4"	98.5	114.3	400	10


■ **產品構造:** 其內核由鍍鋅鋼帶繞製而成，內芯嵌入棉線，以增加其強度及吸震性能，外部被覆抗紫外線PVC。

■ **工作溫度:** -25°C ~ 105°C

■ **阻燃等級:** V0 (UL94), GB8624 B2

■ **防護等級:** IP68

■ **顏色:** 黑色、灰色，其他顏色可以根據需求而定。

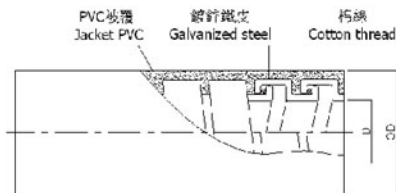

### Type-CA

CA is has jacket flexible metal enhanced conduit

**Structure:** Its core winding made from galvanized steel, the inner core embeddeel cotton thread, in order to increase their strength and shock-absorbing properties. UV-resistant PVC outer coating.

**Temperature Range:** -25°C ~ 105°C

**Flame-retardant:** V0(UL94), GB8624 B2

**Protection Degree:** IP68

**Standard Color:** Black and gray. Other colors available upon request

**Properties or Applications:** Type-CA conduit is widely used in large-scale machinery and equipment and special equipment, its high performance against mechanical damage, as one of the conductors provides good protection, their external PVC hose material sunscreen can guarantee long-term outdoor use.

Passed RoHS